

## Multi-channel open impeller



### General characteristics

- Multi-channel open impeller
- 0,37 ÷ 1,5 kW motor power
- 2 poles
- GAS 1 1/4" - 2" V  
GAS 2" H - DN50 PN10
- max 15 mm free passage

### Electromechanical assembly

Electromechanical assembly in GJL-250 cast iron, for submerged operation. Seal set comprising 1 (one) silicon carbide mechanical seal and 1 (one) graphite alumina mechanical seal, installed opposing with oil lubrication. Oil bath motor. Separate pump body. Series not available in explosion-proof version.

### Applications

Can be used with clear or slightly soiled wastewaters containing small solids, strained water, rainwater, seepage and water pumped from underground. Suitable for heavy-duty domestic and professional applications

### Construction materials

Case	Cast Iron EN-GJL 250
Impeller	Cast iron EN-GJL-250
Nuts and bolts	Stainless Steel - Class A2-70
Standard gasket	Rubber - NBR
Shaft	Stainless Steel - AISI 420
Set of standard mechanical seals	One Silicon carbide mechanical seal (SiC) and One Carbon-Aluminium oxide mechanical seal (AL)

### operating limits


Maximum operating temperature	40 °C
PH of treated fluid	6 to 10 pH
Viscosity of treated fluid	1 mm <sup>2</sup> /s
Maximum immersion depth	20 m
Density of treated fluid	1 Kg/dm <sup>3</sup>
Maximum acoustic pressure	70 dB
max starts per hour	20



**Handle**  
AISI 304 stainless steel lifting and carrying handle



**Structure**  
Constructed in cast iron

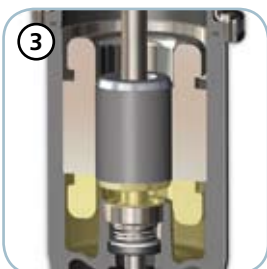

**Motor**  
Oil-bath motor with thermal overloads



**Mechanical seals**  
One mechanical seal in silicon carbide (SiC) and one mechanical seal in alumina graphite (AL)



**Anti-clogging system**  
The special design of the hydraulic part ensures the expulsion of suspended solids and prevents fouling of the impeller




**Intake strainer**  
Intake strainer in stainless steel

# DRO

## Models with vertical GAS 1 1/4" threaded delivery port - 2 poles

### Performances

	l/s	0	1	2	3	4	5	6
	l/min	0	60	120	180	240	300	360
	m <sup>3</sup> /h	0	3,6	7,2	10,8	14,4	18,0	21,6
①	DRO 50/2/G32V A0CM(T)/50	8,8	8,1	6,9	5,2	2,7		
②	DRO 75/2/G32V A0CM(T)/50	12,1	11,8	10,8	9,1	6,9	4,2	0,9

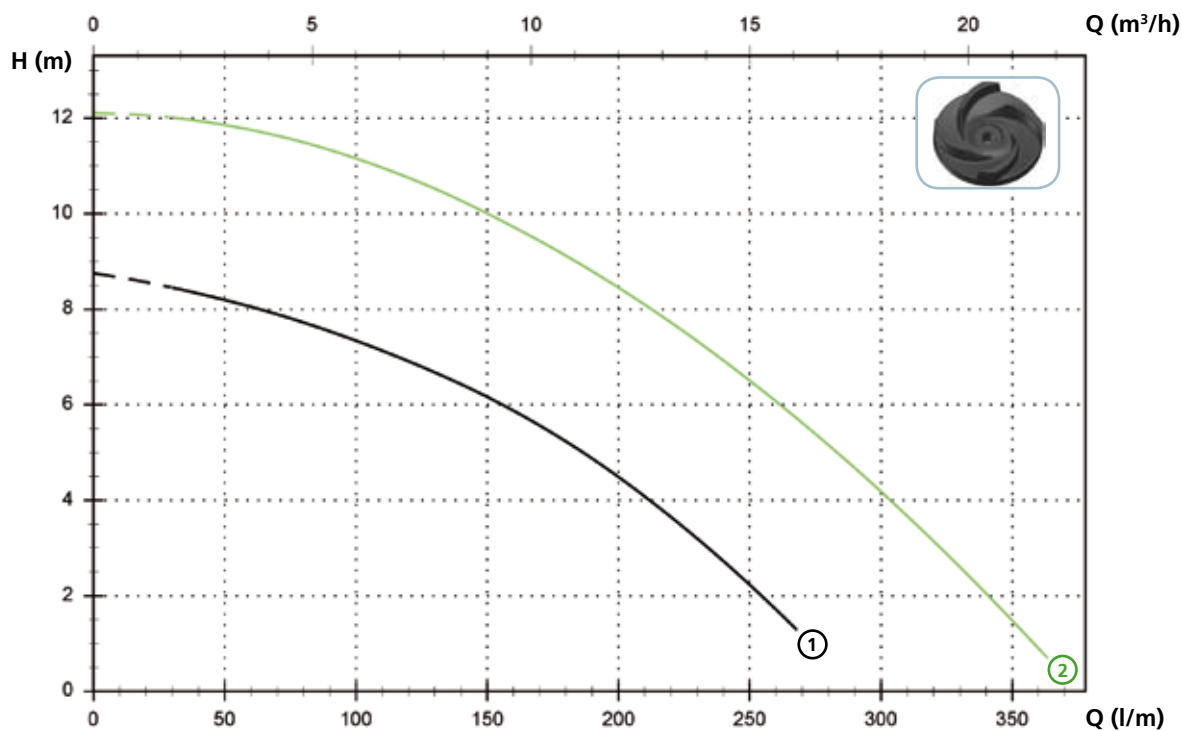

### Technical data

	V	Phases	P1 (kW)	P2 (kW)	A	Rpm	Ø	Cable (*)	Free passage	
①	DRO 50/2/G32V A0CM/50	230	1	-	0.37	2.9	2900	G 1 1/4"	A	15 mm
②	DRO 75/2/G32V A0CM/50	230	1	-	0.55	3.9	2900	G 1 1/4"	A	15 mm


	V	Phases	P1 (kW)	P2 (kW)	A	Rpm	Ø	Cable (*)	Free passage	
①	DRO 50/2/G32V A0CT/50	400	3	-	0.37	1.1	2900	G 1 1/4"	A	15 mm
②	DRO 75/2/G32V A0CT/50	400	3	-	0.55	1.4	2900	G 1 1/4"	A	15 mm

(\*) A = H07RN-F 4G1 - 5 m cable length. Optional 10 m cable length  
 Attention: Standard EN 60335-2-41 requires the use of a 10 m cable length in outdoor applications

**Models with vertical GAS 2" threaded delivery port - 2 poles**

**Performances**

	l/s	0	2	4	6	8	10	12
	l/min	0	120	240	360	480	600	720
	m <sup>3</sup> /h	0	7,2	14,4	21,6	28,8	36,0	43,2
① DRO 100/2/G50V A0CM(T)/50		12,4	11,5	10,0	7,9	5,0	1,1	
② DRO 150/2/G50V A0CM(T)/50		16,3	15,2	13,8	11,9	9,3	6,0	2,1
③ DRO 200/2/G50V A0CM(T)/50		18,4	17,1	15,6	13,9	11,7	8,6	4,5

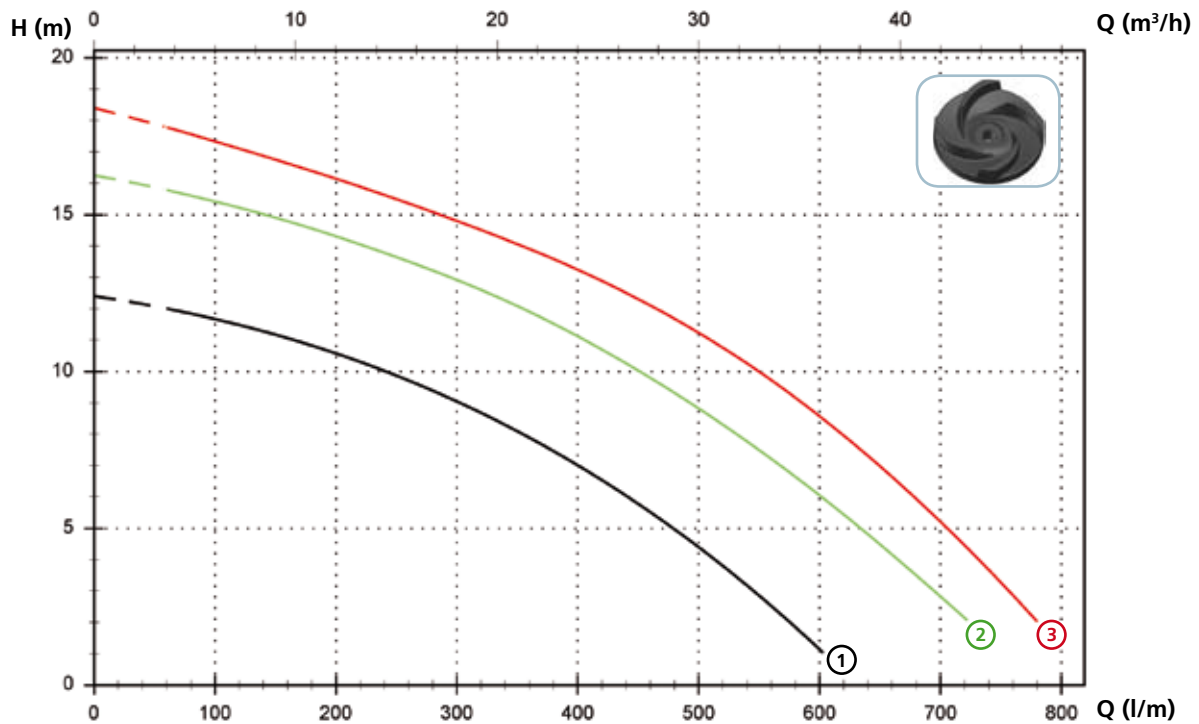

**Technical data**

	V	Phases	P1 (kW)	P2 (kW)	A	Rpm	Ø	Cable (*)	Free passage
① DRO 100/2/G50V A0CM/50	230	1	-	0.88	6.5	2900	G 2"	A	15 mm
② DRO 150/2/G50V A0CM/50	230	1	-	1.1	8.2	2900	G 2"	A	15 mm
③ DRO 200/2/G50V A0CM/50	230	1	-	1.5	9.3	2900	G 2"	A	15 mm

	V	Phases	P1 (kW)	P2 (kW)	A	Rpm	Ø	Cable (*)	Free passage
① DRO 100/2/G50V A0CT/50	400	3	-	0.88	2.3	2900	G 2"	A	15 mm
② DRO 150/2/G50V A0CT/50	400	3	-	1.1	2.7	2900	G 2"	A	15 mm
③ DRO 200/2/G50V A0CT/50	400	3	-	1.5	3.5	2900	G 2"	A	15 mm


(\*) A = H07RN-F 4G1 - 5 m cable length. Optional 10 m cable length  
 Attention: Standard EN 60335-2-41 requires the use of a 10 m cable length in outdoor applications

# DRO

## Models with horizontal GAS 2" threaded - DN50 PN10-16 flanged delivery port - 2 poles

### Performances

	l/s	0	2	4	6	8	10	12
	l/min	0	120	240	360	480	600	720
	m <sup>3</sup> /h	0	7,2	14,4	21,6	28,8	36,0	43,2
①	DRO 100/2/G50H A0CM(T)/50	12,4	11,5	10,0	7,9	4,9		
②	DRO 150/2/G50H A0CM(T)/50	16,3	15,2	13,8	11,9	9,3	6,0	
③	DRO 200/2/G50H A0CM(T)/50	18,4	17,1	15,6	13,9	11,7	8,6	4,5

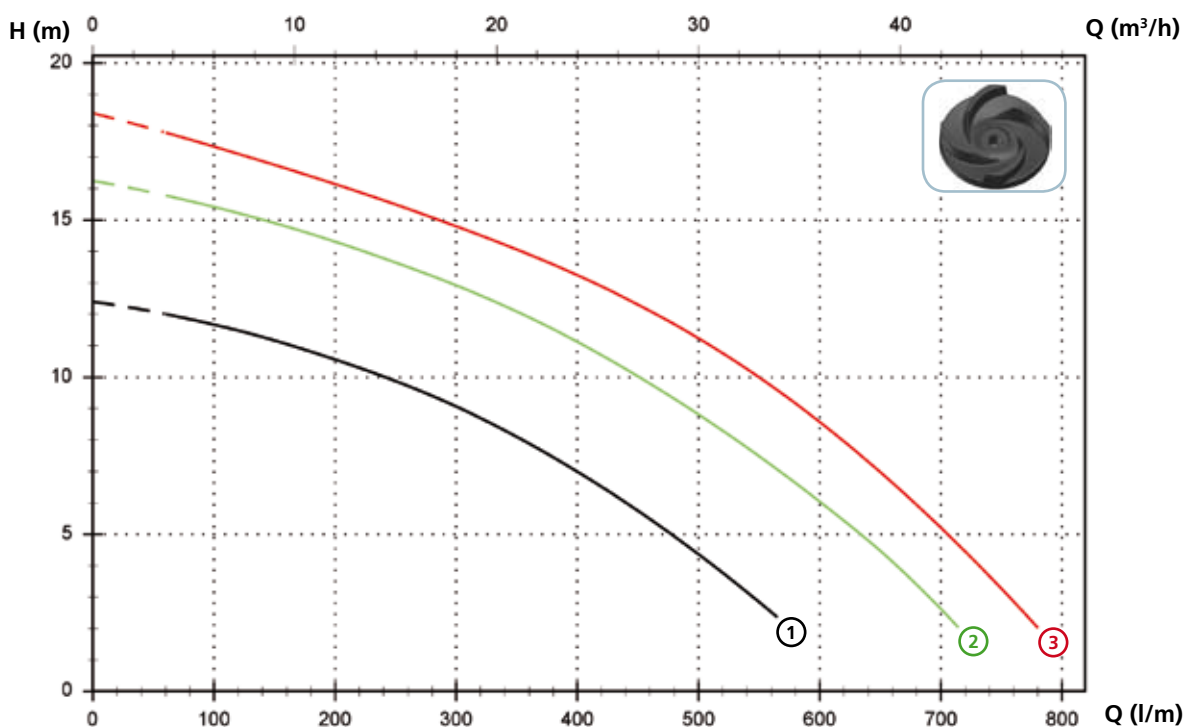

### Technical data

	V	Phases	P1 (kW)	P2 (kW)	A	Rpm	Ø	Cable (*)	Free passage	
①	DRO 100/2/G50H A0CM/50	230	1	-	0.88	6.5	2900	G 2"- DN50 PN10-16	A	15 mm
②	DRO 150/2/G50H A0CM/50	230	1	-	1.1	8.2	2900	G 2"- DN50 PN10-16	A	15 mm
③	DRO 200/2/G50H A0CM/50	230	1	-	1.5	9.3	2900	G 2"- DN50 PN10-16	A	15 mm

	V	Phases	P1 (kW)	P2 (kW)	A	Rpm	Ø	Cable (*)	Free passage	
①	DRO 100/2/G50H A0CT/50	400	3	-	0.88	2.3	2900	G 2"- DN50 PN10-16	A	15 mm
②	DRO 150/2/G50H A0CT/50	400	3	-	1.1	2.7	2900	G 2"- DN50 PN10-16	A	15 mm
③	DRO 200/2/G50H A0CT/50	400	3	-	1.5	3.5	2900	G 2"- DN50 PN10-16	A	15 mm

(\*) A = H07RN-F 4G1 - 5 m cable length. Optional 10 m cable length  
 Attention: Standard EN 60335-2-41 requires the use of a 10 m cable length in outdoor applications


**Versions available**

(Key to versions on page 15)

	Electrical variants												Cooling		Mechanical seals					
	N A E	T	T C	T C D	T C D T	T C D G T	T C G	T C S T	T C S G T	T S	T R	T R G	F T	C G F T	N	CC	2SIC	SICM	SICAL	2SICAL
DRO 50/2/G32V A0CM/50		●						●	●					●					●	
DRO 75/2/G32V A0CM/50		●						●	●					●					●	
DRO 100/2/G50V A0CM/50		●						●	●					●					●	
DRO 150/2/G50V A0CM/50		●						●	●					●					●	
DRO 200/2/G50V A0CM/50		●						●	●					●					●	
DRO 100/2/G50H A0CM/50		●						●	●					●					●	
DRO 150/2/G50H A0CM/50		●						●	●					●					●	
DRO 200/2/G50H A0CM/50		●						●	●					●					●	
DRO 50/2/G32V A0CT/50	●													●					●	
DRO 75/2/G32V A0CT/50	●													●					●	
DRO 100/2/G50V A0CT/50	●													●					●	
DRO 150/2/G50V A0CT/50	●													●					●	
DRO 200/2/G50V A0CT/50	●													●					●	
DRO 100/2/G50H A0CT/50	●													●					●	
DRO 150/2/G50H A0CT/50	●													●					●	
DRO 200/2/G50H A0CT/50	●													●					●	

**Overall dimensions and weights**

Models with vertical delivery port

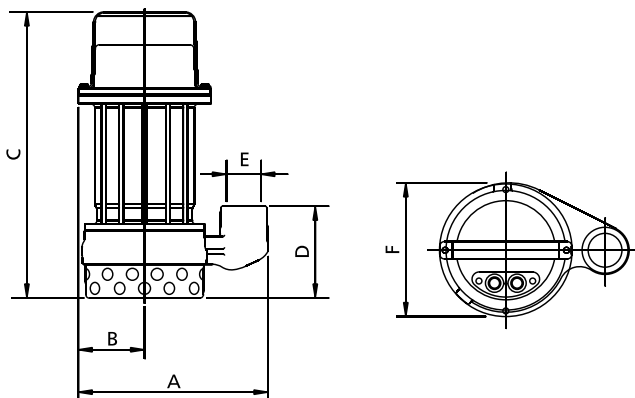


	A	B	C	D	E	F	kg
DRO 50/2/G32V A0CM(T)/50	220	75	330	105	G 1 1/4"	155	15
DRO 75/2/G32V A0CM(T)/50	220	75	330	105	G 1 1/4"	155	15.5
DRO 100/2/G50V A0CM(T)/50	260	95	385	125	G 2"	195	19.5
DRO 150/2/G50V A0CM(T)/50	260	95	385	125	G 2"	195	20.5
DRO 200/2/G50V A0CM(T)/50	260	95	385	125	G 2"	195	21.5

Measurements in mm

# DRO

## Models with horizontal delivery port

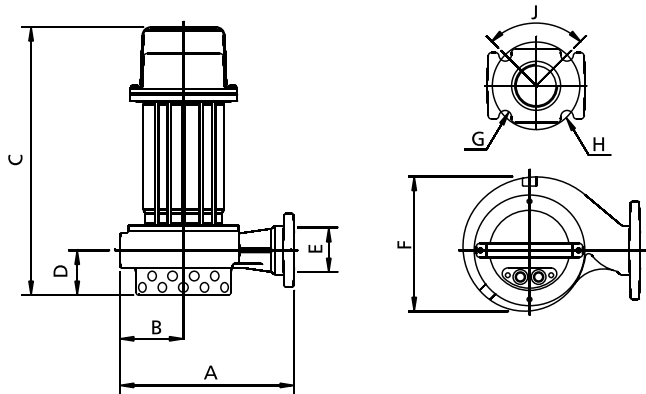


	A	B	C	D	E	F	G	H	J	kg
DRO 100/2/G50H A0CM(T)/50	250	90	385	65	G 2"-DN50	195	18	125	90°	19.5
DRO 150/2/G50H A0CM(T)/50	250	90	385	65	G 2"-DN50	195	18	125	90°	20.5
DRO 200/2/G50H A0CM(T)/50	250	90	385	65	G 2"-DN50	195	18	125	90°	21.5

Measurements in mm

## Packaging dimension

	A	B	C
DRO 50/2/G32V A0CM(T)/50	385	225	245
DRO 75/2/G32V A0CM(T)/50	385	225	245
DRO 100/2/G50V A0CM(T)/50	475	285	235
DRO 150/2/G50V A0CM(T)/50	475	285	235
DRO 200/2/G50V A0CM(T)/50	475	285	235
DRO 100/2/G50H A0CM(T)/50	475	285	235
DRO 150/2/G50H A0CM(T)/50	475	285	235
DRO 200/2/G50H A0CM(T)/50	475	285	235



Dimension in mm

## No. pieces per pallet

For DRO 50-75 models each pallet (EUR 1000X1200 mm) is able to take 48 pieces.  
For DRO 100-150-200 models each pallet (EUR 1000X1200 mm) is able to take 32 pieces.

## Installations available

